


S = high speed 1100 rpm
L = low speed 870 rpm



Modello	Type	FHD (3 = 3.0 mm)		711-3		712-3		721-3		722-3		732-3		742-3	
Potenza	Capacity	TC 2,5 °C ΔT1 10K	W	3350	3800	4550	5350	6750	7650	9150	10750	13650	15900	15600	19800
Portata d'aria	Air quantity		m³/h	1400	1800	1400	1800	2800	3600	2800	3600	4200	5400	5900	7200
Freccia d'aria	Air throw		m	8	11	8	11	10	12	10	12	11	14	12	15
Modello	Type	FHD (4 = 4.5 mm)		811-4		812-4		821-4		822-4		832-4		842-4	
Potenza	Capacity	TC 2,5 °C ΔT1 10K	W	2750	3100	4000	4550	5500	6200	7950	9100	12050	13750	15600	17650
Portata d'aria	Air quantity		m³/h	1500	1900	1500	1900	2900	3800	2900	3800	4400	5700	5900	7600
Freccia d'aria	Air throw		m	9	11	9	11	10	13	10	13	11	14	12	15
Modello	Type	FHD (7 = 7.0 mm)		911-7		912-7		921-7		922-7		932-7		942-7	
Potenza	Capacity	TC 2,5 °C ΔT1 10K	W	2000	2200	3050	3450	4000	4400	6100	6850	9350	10550	12400	13900
Portata d'aria	Air quantity		m³/h	1600	2000	1600	2000	3100	4000	3100	4000	4700	6000	6200	8000
Freccia d'aria	Air throw		m	9	12	9	12	11	14	11	14	12	15	13	16
DATI COMUNI / COMMON DATA															
Elettroventilatori	Fans	Ø 350 mm	n°	L S		L S		L S		L S		L S		L S	
Assorbimento motori	Motor power consumption	1~230 V 50 Hz	W	40	82	40	82	80	164	80	164	120	246	160	328
			A	0.4	0.7	0.4	0.7	0.8	1.4	0.8	1.4	1.2	2.1	1.6	2.8
Sbrinamento	Defrost	E 230 V	W	1800		1800		3200		3200		4700		6200	
Volume circuito	Circuit volume		dm³	1,1		2,3		2,1		4,2		6,1		7,9	
Dimensioni	Dimensions	A	mm	888		888		1443		1443		1998		2553	

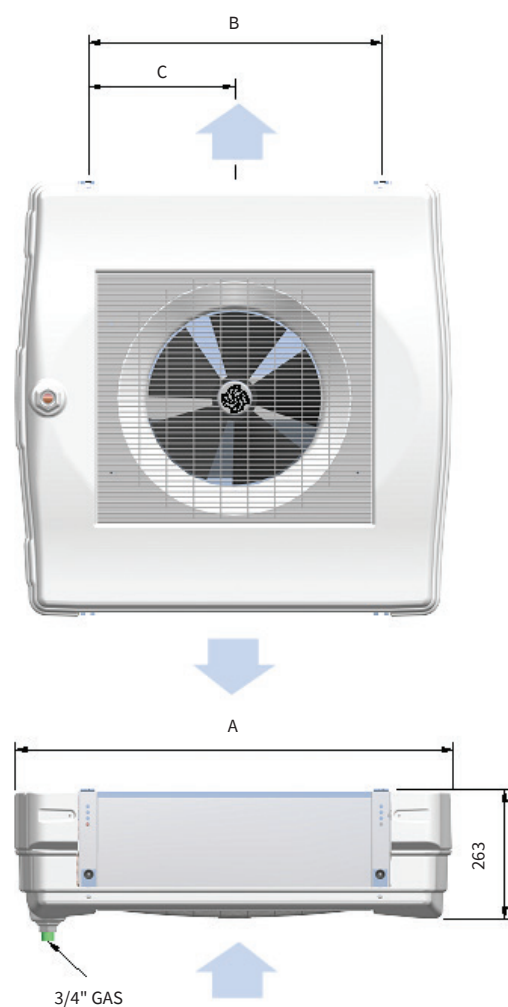

1130 - 8250 W



32 = 3.0 mm Passo alette Fin spacing									TC > 0 °C
Modello	Type	FHA	30-32	40-32	60-32	80-32	120-32	160-32	
Potenza (R404)	(+)TC 2,5 °C (ΔT1 10 K)	W	1650	2050	3350	4150	6300	8250	
Capacity	TC 0 °C (ΔT1 8 K)	W	1200	1500	2470	3050	4650	6100	
Portata d'aria	Air quantity	m³/h	550	650	1100	1300	1950	2600	
Freccia d'aria	Air throw	m	8	8	9	9	10	11	
Superficie esterna	External surface	m²	5,6	7,8	11,2	15,6	23,4	32,2	
Superficie interna	Internal surface	m²	0,4	0,5	0,8	1,0	1,5	2,0	
Peso	Weight	kg	9,5	11,5	16,5	20,5	29,5	39,0	
50 = 4.5 mm Passo alette / Fin spacing						TC > -18 °C			
Modello	Type	FHA	21-50	27-50	41-50	53-50	79-50	106-50	
Potenza (R404)	(+)TC 2,5 °C (ΔT1 10 K)	W	1450	1800	2950	3600	5500	7350	
Capacity	TC 0 °C (ΔT1 8 K)	W	1050	1350	2180	2660	4050	5450	
Portata d'aria	Air quantity	m³/h	600	720	1200	1440	2160	2880	
Freccia d'aria	Air throw	m	9	9	10	10	11	12	
Superficie esterna	External surface	m²	3,8	5,3	7,7	10,6	15,9	21,2	
Superficie interna	Internal surface	m²	0,4	0,5	0,8	1,0	1,5	2,0	
Peso	Weight	kg	9,0	10,5	15,5	19,0	27,5	36,0	
80 = 7.0 mm Passo alette / Fin spacing						TC > -18 °C			
Modello	Type	FHA	14-80	17-80	28-80	35-80	52-80	70-80	
Potenza (R404)	(+)TC 2,5 °C (ΔT1 10 K)	W	1130	1370	2270	2730	4260	5730	
Capacity	TC 0 °C (ΔT1 8 K)	W	850	1000	1680	2010	3150	4250	
Portata d'aria	Air quantity	m³/h	670	750	1340	1500	2250	3000	
Freccia d'aria	Air throw	m	10	10	11	11	12	13	
Superficie esterna	External surface	m²	2,6	3,5	5,1	7,1	10,6	14,2	
Superficie interna	Internal surface	m²	0,4	0,5	0,8	1,0	1,5	2,0	
Peso	Weight	kg	8,5	10,0	15,0	18,0	26,0	34,0	
DATI COMUNI / COMMON DATA									
Elettroventilatori	Fans	Ø 275 mm	n°	1	1	2	2	3	4
Assorbimento motori	Motor power consumption	W	105	105	196	196	315	340	
		A	0,65	0,65	1,30	1,30	1,95	2,60	
Assorbimento motori	Motor power consumption	EC 1~230 V	W	24	29	48	48	72	72
		50 Hz	A	0,16	0,16	0,32	0,32	0,48	0,48
Sbrinamento	Defrost	E 230 V	W	500	650	900	1200	1750	2300
Volume circuito	Circuit volume		dm³	0,6	0,9	1,2	1,7	2,5	3,2
Attacchi entrata	Inlet connections	Ø mm	10	12	12	12	12	12	
Attacchi uscita	Outlet connections	Ø mm	10	22	22	28	28	28	
Dimensioni	Dimensions	A	mm	605	730	920	1170	1630	2080
		B	mm	293	418	618	868	1318	1768

(+) Per altre condizioni vedere diagrammi. (+) For other conditions see diagrams.

EC = Motori con commutazione elettronica (1400 r.p.m.). EC = Motors with electronic commutation (1400 r.p.m.).

