



DF Dehumidifier

Comfort

Low-noise Design



Smart

Smart Dehumidification
Auto Restart

Comfort

Low-noise Design

Minimize noise and maximize comfort by optimizing the refrigeration and air duct systems. The noise is as low as **39dB**.



Comfort

Low-noise Design

DF Dehumidifier uses the reciprocating compressor with less vibration, which can effectively reduce noise.

Reciprocating
Compressor



Smart

Smart Dehumidification


Automatically control room humidity in a comfortable range **45%-55%** according to room temperature, which inhibits bacteria growth.



Smart

Auto Restart

If the unit breaks off unexpectedly due to the power cut, it will restart with the previous function setting automatically when the power resumes.

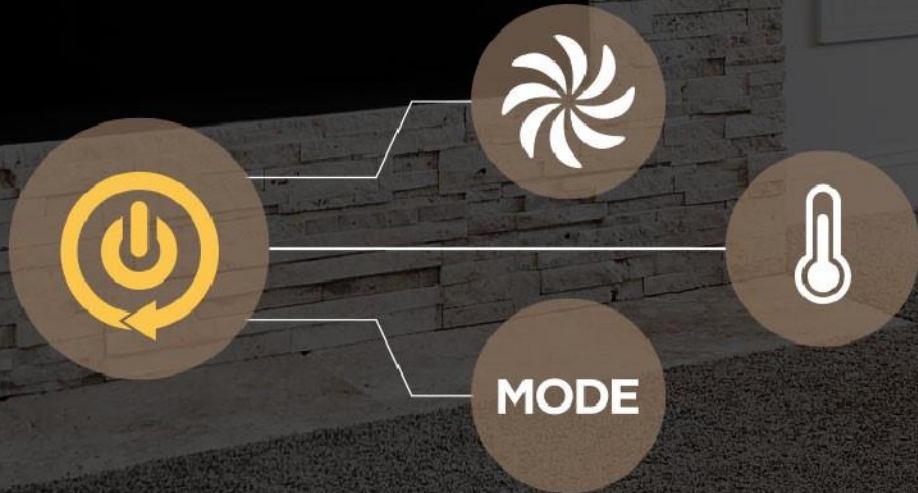

THANK YOU!

Sales Model			CDF-20Q7
Factory Model			EU-CFZ0.8BD/N7-DF(A3)
Code			22020110001259
Power supply		V-Hz-Ph	220-240V,50Hz, 1Ph
Performance	Moisture removal (30 °C/80%)	L/day	20
	Rated input (30 °C/80%)	W	360
	Rated current (30 °C/80%)	A	2.10
	EEV	L/kWh	2,30
Starting current		A	10,0
Plug type			0.75x3/VDE
Control type			Electronic Control
System Data	Refrigerant type	kg	R290/0.075
	Design pressure	MPa	2.6/1.0
	Water tank volume	L	3
	Air flow (Hi/Mi/Lo)	m3/h	168/125/99
	Sound pressure level (Hi/Mi/Lo)	dB(A)	46/43/41
Applicable Ambient	RH Range Manual		35%~85%
	Ambient temp	°C	5~32
	Application area	m2	37-52
Dimension (W*D*H)		mm	350x245x510
Packing (W*D*H)		mm	385x300x530
Net/Gross weight		kg	15.0/16.0
Loading quantity 20' /40' /40'HQ		Pcs	464/960/1194